



370 - 385 Wp

AXITEC
high quality german solar brand

AXIpremium XL HC BLK

High performance solar module
120 halfcell, monocrystalline

The advantages:

- 15** Years 15 years Manufacturer's warranty
- HC** High module performance through Half-Cut-technology and selected materials
- Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 100%** 100% visual electroluminescence inspection in production
- Frame** High stability due to innovative frame design
- IP 68** High quality junction box and connector systems



Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

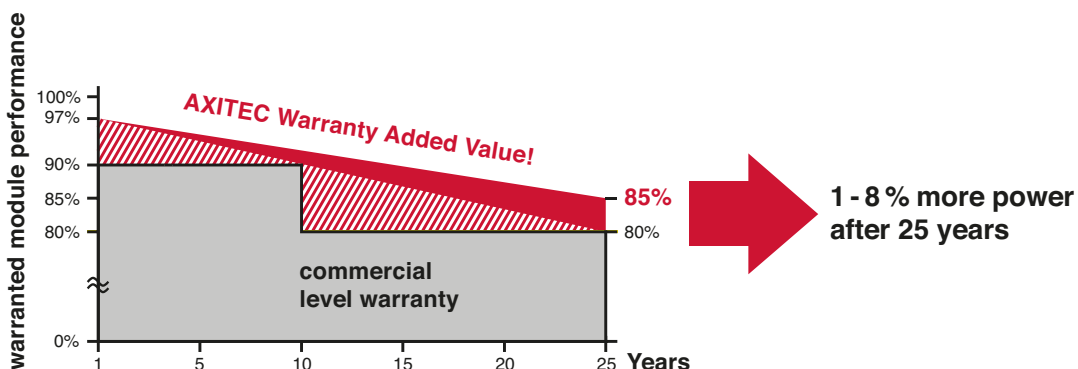


Fig. similar 120MHEN211209A

AXIpremium XL HC BLK 370 - 385 Wp

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-370MH/120V	370 Wp	34.09 V	10.86 A	11.39 A	41.32 V	20.31 %
AC-375MH/120V	375 Wp	34.29 V	10.94 A	11.46 A	41.56 V	20.59 %
AC-380MH/120V	380 Wp	34.49 V	11.02 A	11.53 A	41.72 V	20.86 %
AC-385MH/120V	385 Wp	34.69 V	11.10 A	11.60 A	41.88 V	21.13 %

Design

Frontside	3.2 mm hardened, low-reflection white glass
Cells	120 monocrystalline high efficiency cells
Backside	Composite film
Frame	30 mm black aluminium frame

Mechanical data

L x W x H	1755 x 1038 x 30 mm
Weight	19.3 kg with frame

Mechanical load

Design load (pressure/suction)	3600 Pa / 1600 Pa
Test load (pressure/suction)	5400 Pa / 2400 Pa

Power connection

Socket	Protection Class IP68
Wire	approx. 1.2 m, 4 mm ²
Plug-in system	Plug/socket IP68, Stäubli EVO2 / EVO2 pluggable

Limit values

System voltage	1500 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	20.0 A

Permissible operating temperature -40°C to 85°C / -40F to 185F

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0.27 %/K
Current I _{sc}	0.048 %/K
Output P _{mp}	-0.35 %/K


Low-light performance

 (Example for AC-385MH/120V)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	2.27 A	33.39 V
400 W/m ²	4.58 A	33.77 V
600 W/m ²	6.84 A	33.03 V
800 W/m ²	9.04 A	34.63 V
1000 W/m ²	11.10 A	34.69 V

Packaging

Module pieces per pallet	36
Module pieces per HC-container	936

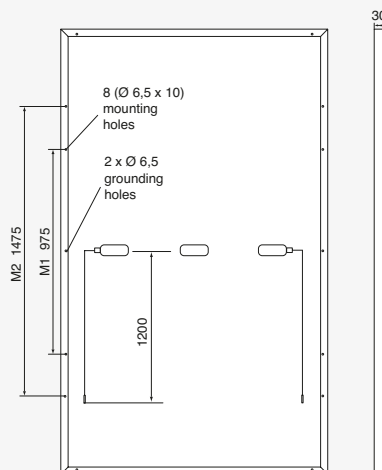

All dimensions in mm