


# Terracotta BIPV

MEPV 108 cells — Eurener PV Module

> 350/355/360/365 Wp

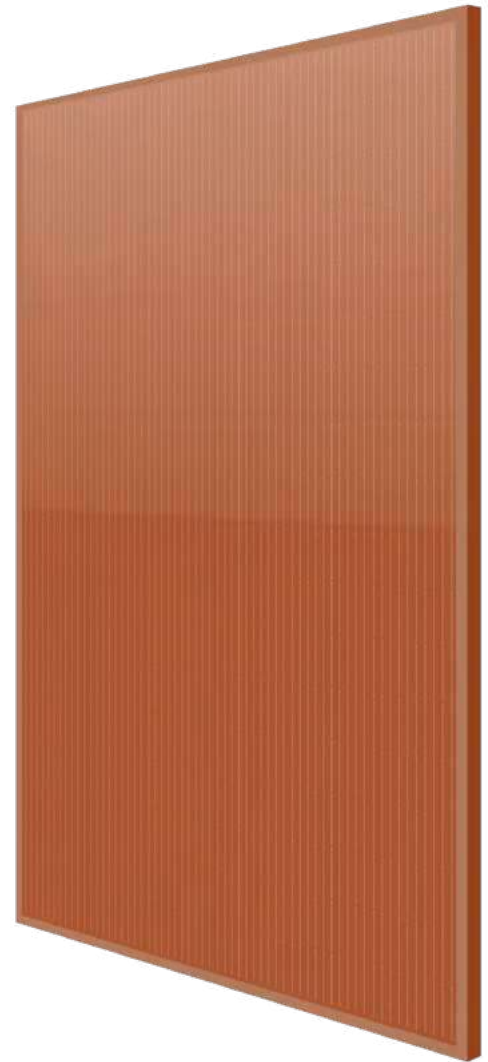

**BIPV**  
Architectural integration



**N-type cell**  
Higher resistance to LID and LeTID



**TOPCon**  
Technology to increase cell efficiency



**Easy to handle**  
Comfortable installation thanks to an optimized area size



**SuperMBB**  
Reduced resistance losses and improved current collection



**Better temperature coefficient**  
Minimized thermal losses, improved efficiency




**20** Years

**Product Warranty**  
+5 years for Premium Partners

**25** Years



**Performance Warranty**  
Linear Warranty

84,8% performance at 25 years

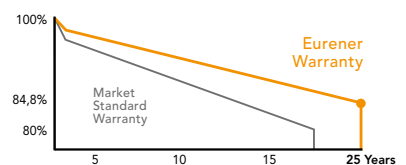



# Eurener MEPV 108 — TERRACOTTA BIPV 350-365Wp

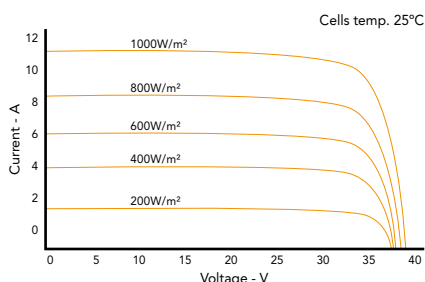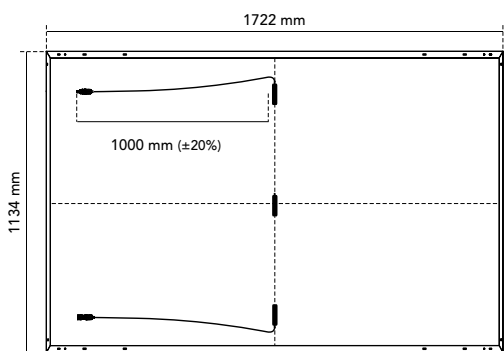

Mechanical Specification	
Solar cells	108 (6 x 18), N-Type monocrystalline silicon cells
Colour	RAL 8001
Front Glass	3,2 mm thick tempered glass with high strength and ARC
Frame	Terracotta anodized aluminium
Junction Box	IP68, 3 by-pass diodes
Connector	Connector MC4 compatible
Cable	1000 mm (±20%) length and 4 mm² section
Dimension	1722 x 1134 x 30 mm (±1%)
Area	1,95 m²
Weight and packaging	20,5 kg, 936 pcs-truck

Temperature Coefficients	
Temperature coefficient of Isc ( $\alpha$ )	0,05 %/°C
Temperature coefficient of Voc ( $\beta$ )	-0,28 %/°C
Temperature coefficient of Pmax ( $\gamma$ )	-0,29 %/°C
Temperature range	-40 °C ~ +85 °C
Nominal operating cell temperature (NOCT)	45 ± 2 °C

Terracotta	MEPV 350	MEPV 355	MEPV 360	MEPV 365
<b>STC: 1000 W/m<sup>2</sup>, module temperature 25°C, AM 1,5</b>				
Nominal power. Pmax	350 Wp	355 Wp	360 Wp	365 Wp
Module efficiency	17,95 %	18,23 %	18,45 %	18,71 %
Short-circuit current (Isc)	11,43 A	11,47 A	11,61 A	11,69 A
Open-circuit voltage (Voc)	38,47 V	38,59 V	38,98 V	39,22 V
Maximum power current (Imp)	10,52 A	10,62 A	10,71 A	10,83 A
Maximum power voltage (Vmp)	33,26 V	33,42 V	33,63 V	33,69 V
<b>NOCT: 800 W/m<sup>2</sup>, ambient temperature 20°C, AM 1,5</b>				
Nominal power. Pmax	266 Wp	270 Wp	274 Wp	277 Wp
Short-circuit current (Isc)	8,99 A	9,06 A	9,17 A	9,19 A
Open-circuit voltage (Voc)	36,24 V	36,43 V	36,56 V	36,87 V
Maximum power current (Imp)	8,55 A	8,59 A	8,69 A	8,75 A
Maximum power voltage (Vmp)	31,12 V	31,40 V	31,49 V	31,69 V
<b>Operating parameters</b>				
Maximum voltage	1000 - 1500 V			
Maximum series fuse rating. Ir	25 A			
Power output tolerance	0 - +3%			
Voc and Isc tolerance	±3%			
Fire rating	Class C (UL 790)			
Protection class	Class II (IEC 61140)			
Hail resistance	HW3/RG3			
Mechanical loads	Front load 5400 Pa, Back load 2400 Pa			

NOTE: Read the instruction manual of this product and follow the indications STC. Values are valid for: 1000W/m<sup>2</sup>, AM 1,5 and cells temperature of 25°C. Measurement tolerance +/-3% (AAA Solar simulation -IEC 60.904-9-). All the information of this brochure may be amended without notice by Eurener.

Eurener\_MEPV 108\_TERRACOTTA BIPV\_350-365Wp\_EN\_MAR2024

**SINCE**  
**1997**  
more than  
energy



**eurener.com**  
contact@eurenerworld.com  
+34 960 045 515  
Calle Colón, 1-23  
46004, Valencia. Spain

## Manufacturing a better world

Since 1997 our main purpose has been to supply quality and long-lasting photovoltaic modules that allow us and future generations, to continue generating clean energy to take care of our planet.